
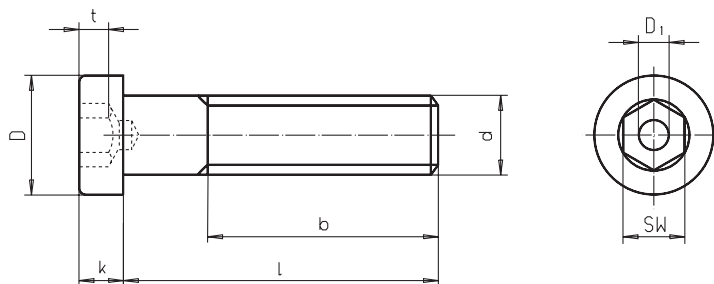


SM 1291-01

DIN 6912

Zylinderschrauben mit Innensechskant, niedriger Kopf

Hexagon socket head cap screws, shallow head

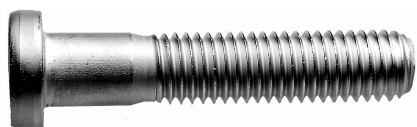

Catalog No.	d	X	I	Material
SM 1291-01	M08	X	30	St



M04 - M08



M10 - M12



St: Stahl, verzinkt
steel, zinc plated



Festigkeitsklasse 8.8
grade 8.8



mm



Reinigen mit
SM 1306
Clean with
Seite 360



Kleben mit
SM 1301
Lock with
Seite 357


b	14	16	18	22	26	30
D Ø	7,0	8,5	10,0	13,0	16,0	18,0
k	2,8	3,5	4,0	5,0	6,5	7,5
D ₁ Ø	2,0	2,5	3,0	4,0	5,0	6,0
SW	03	04	05	05	08	10
t	1,48	1,88	2,38	2,88	3,35	3,85
	€					
	d Ø					
I	M04	M05	M06	M08	M10	M12
10	0,31	0,36	0,40	0,74	-	-
12	0,31	0,33	0,35	0,65	-	-
16	0,31	0,35	0,40	0,48	1,52	-
20	0,35	0,35	0,41	0,48	0,81	1,40
25	0,36	0,36	0,41	0,51	0,83	1,31
30	-	0,40	0,42	0,56	0,85	1,36
35	-	-	0,44	0,64	0,96	1,46
40	-	-	0,53	0,73	1,06	1,57
45	-	-	0,56	0,81	1,21	1,79
50	-	-	0,64	0,85	1,21	1,85
60	-	-	0,76	0,96	1,46	2,17
70	-	-	-	1,16	1,85	2,48

SM 1291-02

DIN 931 / ISO 4014

Sechskantschrauben mit Schaft

Hexagon socket screws, metric coarse thread

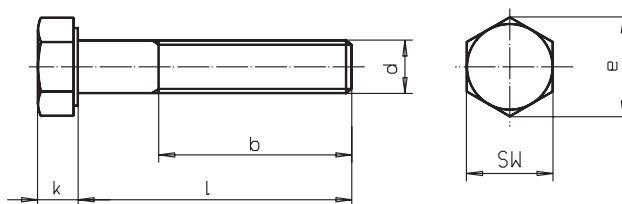

Catalog No.	d	X	I	Material
SM 1291-02	M08	X	035	S



M04 - M08



M10 - M12



S: Stahl, verzinkt
steel, zinc plated



Festigkeitsklasse 8.8
grade 8.8



mm



* In sind diese Längen nicht erhältlich.
In stainless steel not available.
** Schlüsselweite nach DIN ISO 272
Widths across flats, external like DIN
ISO 272.



Reinigen mit
SM 1306
Clean with
Seite 360



Kleben mit
SM 1301
Lock with
Seite 357

b	14	16	18	22	26	30
SW	07	08	10	13	17**	19**
e	7,66	8,79	11,05	14,38	18,90	21,10
k	2,8	3,5	4,0	5,3	21,1	7,5
	€					
	d Ø					
I	M04	M05	M06	M08	M10	M12
025	0,15	0,15*	-	-	-	-
030	0,15	0,15	0,10	-	-	-
035	0,20	0,20	0,10	0,15	-	-
040	0,23	0,20	0,10	0,15	0,28	-
045	0,25	0,22*	0,10	0,15	0,33	0,41
050	-	0,25	0,12	0,20	0,35	0,44
060	-	0,28	0,19	0,22	0,35	0,46
070	-	-	0,34	0,28	0,39	0,54
080	-	-	-	0,35	0,40	0,56
090	-	-	-	-	0,54	0,69
100	-	-	-	-	0,65	0,85
110	-	-	-	-	-	1,33
120	-	-	-	-	-	1,43