




Catalog No.	b ₁	X	l	Material
SM 1060	14	X	125	ST




ST: Vergütungsstahl, lackiert
heat treated steel, varnished
AL: Aluminium

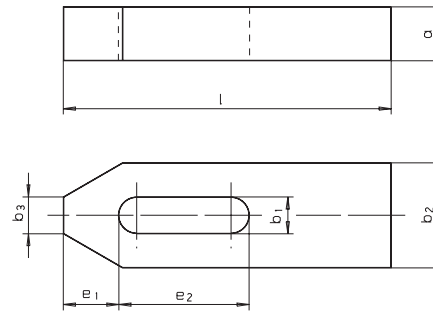

*, nicht nach DIN 6314.
*, not according to DIN 6314.



mm



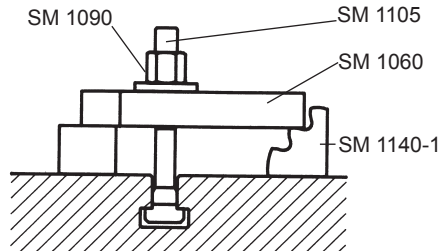


b ₁	l	a	b ₂	b ₃	e ₁	e ₂	für Nuten- schrauben T-bolts SM 1105	kg
6.6	050	10	20	8	10	20	M6	0,063
09	060	12	25	10	13	22	M8	0,114
11	080	15	30	12	15	30	M10	0,227
14	100	20	40	14	21	40	M12, M14	0,490
	125					50	M12, M14	0,620
18	125	25	50	18	26	45	M16, M18	0,961
	160					65	M16, M18	1,240
22	160	30	60	22	30	60	M20, M22	1,781
	200					80	M20, M22	2,238
26	200		70	26	35	80	M24	2,582
	250	(35)				105	M24	3,802
33	250	40	80	34	45	100	M30	4,935
	315	50				130	M30	7,790
43*	400	60	100	43	100	150	M36, M42	14,998

SM 1061

Spanneisen mit abgeflachter Kugel

Clamp with ball support

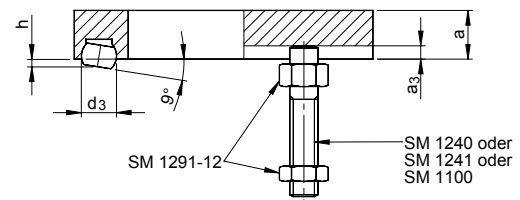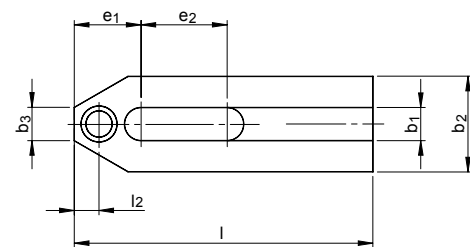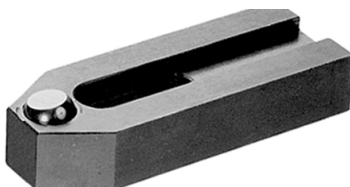

Catalog No.	b ₁	X	l ₁
SM 1061	11	X	080



Spanneisen: Vergütungsstahl, brüniert
Kugel: Wälzlagerstahl, gehärtet
clamp: heat treated steel, blackened
ball: ball-bearing steel, hardened



Kugel: gehärtet, blank
ball: hardened and bright



mm



Durch die beweglich gelagerte Kugel kann mit diesen Spanneisen weitgehend verzugsfrei gespannt werden. Kugel gegen Verdrehen gesichert.
Due to the flexibly supported ball, these clamps can achieve distortion-free clamping to a large extent. Ball secured against turning.



b ₁	l ₁	a	a ₃	b ₂	d ₃ Ø	e ₁	e ₂	h	l ₂	Kugel Ball	kg
07	050	10	2,5	20	5,8	10	20	1,6	5,0	8,5	0,060
09	060	12	3,0	25	7,2	13	15	2,0	6,5	10,0	0,110
11	080	15	3,5	30	8,6	15	30	2,7	7,5	12,0	0,220
13	125	20	4,0	40	10,5	21	50	3,5	10,5	16,0	0,615