




Catalog No. **d₁**
SM 1280-12 12



Spezialstahl
special steel

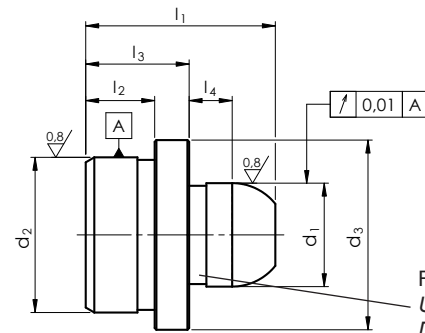

gehärtet und geschliffen
hardened and ground



mm




Sondermaße
special dimensions




✓RoHS
Konform
Compliant

SM1001



SM1280-12




kg

d ₁ m6 Ø	d ₂ n6 Ø	d ₃ -0,2 Ø	l ₁	l ₂	l ₃	l ₄	r	kg
06	10	14	17,5	7	10	4,5	3,5	0,009
08	12	16	18,0	7	10	4,5	4,0	0,013
12	18	22	22,0	8	12	5,0	6,0	0,035
16	26	30	30,0	12	16	7,0	8,0	0,091
20	30	35	38,0	15	20	9,0	10,0	0,158

SM 1280-2

Führungsbolzen Dowel

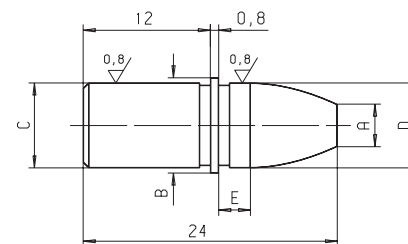

Catalog No. **D**
SM 1280-2 06



Spezialstahl
special steel






gehärtet und geschliffen
hardened and ground



mm



✓RoHS
Konform
Compliant

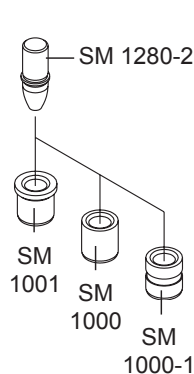

kg



Reinigen mit
SM 1306
Clean with



Kleben mit
SM 1300
Lock with

D h6 Ø	A Ø	B Ø	C n6 Ø	E	kg
06	3	7	06	3,0	0,005
08	4	9	08	3,0	0,008
10	5	11	10	4,5	0,013
12	6	13	12	4,5	0,015