


SM 1000-1

ähnl. SM 1000 / DIN 179

Kordelbuchse


Knurled drill bushing

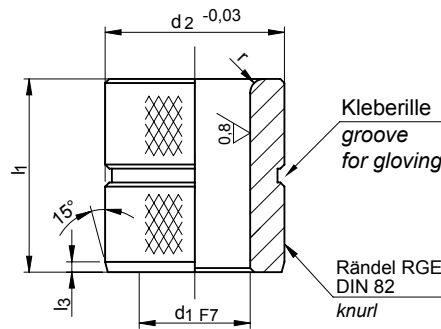

Form A



Form B



Catalog No.	Form	d ₁	X	I ₁
SM 1000-1	A	01.90	X	06



Spezialstahl
special steel



gehärtet und geschliffen
hardened and ground



HRc 63±1



mm



0,1; 0,25; 0,75 mm
über 15 mm 0,5 mm



andere Materialien und Abmessungen
other materials and dimensions



CAD-Daten verfügbar
CAD-files available




d ₁ F7 Ø	d ₂ Ø -0,03	I ₁ kurz short	I ₁ mittel medium	I ₁ lang long	I ₃	r
01,00 - 01,80	04	06	08	-	1,00	1,0
01,90 - 02,60	05		09	-		
02,70 - 03,30	06	08	12	16		
03,40 - 04,00	07					
04,10 - 05,00	08				1,25	1,5
05,10 - 06,00	10	10	16	20		
06,10 - 08,00	12					
08,10 - 10,00	15	12	20	25		
10,10 - 12,00	18				1,50	2,0
12,10 - 15,00	22	16	28	36		
15,10 - 18,00	26					
18,10 - 22,00	30	20	36	45		


SM 1000-2

Sechskantbohrbuchse


Hexagon drill bushing

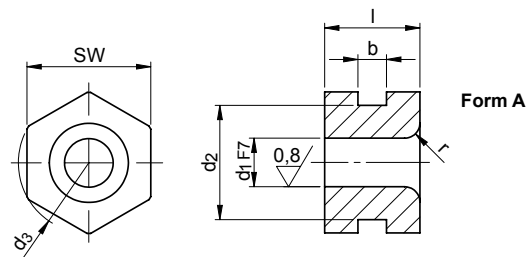

Form A



Form B



Catalog No.	Form	d ₁	X	I
SM 1000-2	A	05.00	X	10



Spezialstahl
special steel



gehärtet und geschliffen
hardened and ground



HRc 63±1



mm



CAD-Daten verfügbar
CAD-files available



Reinigen mit
SM 1306
Clean with



Eingießen mit
SM 1304
Clean with

d ₁ F7 Ø	I	SW	d ₂ Ø	d ₃ Ø -0,05	b	r
01,10 - 01,80	08	8	7,5	9,0	3	1,2
01,90 - 02,50			7,5			
02,60 - 03,20		9	8			
03,30 - 04,00	10	11	10	12,3		1,6
04,10 - 05,00			10			
05,10 - 06,00		13	12			

d ₁ F7 Ø	I	SW	d ₂ Ø	d ₃ Ø -0,05	b	r
06,10 - 08,00	12	15	14	16,6	4	2,0
08,10 - 10,00		17	16	19,0		2,5
10,10 - 12,00		22	21	24,3	6	4,0
12,10 - 15,00	16	24	22,5	27,0		
15,10 - 18,00		27	26	30,0		
18,10 - 22,00	18	32	31	35,4	8	

