




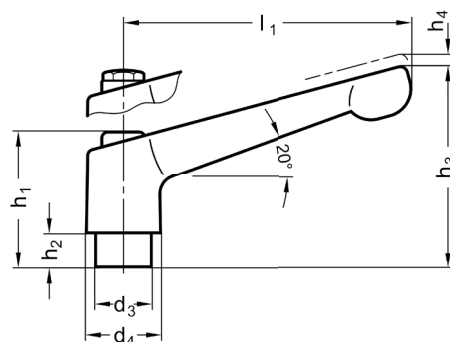

Catalog No.	Form	l_1	d_1/d_2
SM 1199-1	AS	078	M10

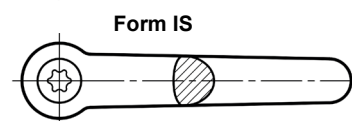

Griffkörper:	Edelstahl-Feinguss 1.4308 matt gestrahlt
Buchse:	Edelstahl rostfrei 1.4305
Halteschraube:	Edelstahl rostfrei 1.4305
Druckfeder:	Edelstahl rostfrei 1.4310
handle:	stainless steel precision casting AISI CF-8 (1.4308) matte-shot blasted
bushes:	stainless steel AISI 303 (1.4305)
screw:	stainless steel AISI 303 (1.4305)
spring:	stainless steel AISI 301 (1.4310)



Form IS: mit Innensechsrund / with internal hexalobular
Form AS: mit Außensechskant / with external hexagon


Hebelverstellung durch Ziehen.

Der Gewindeinsatz ist durch eine Kerbverzahnung mit dem Griff lösbar verbunden.

Einsatz z. B. in der Nahrungsmittel- oder chemischen Industrie.

Pulling the lever, disengages the serrations and the lever can be swivelled to the ideal clamping position. The threaded insert is connected with the hub via serrations which can be disengaged.

Correspond to applications where „agressive“ surrounding conditions are given.

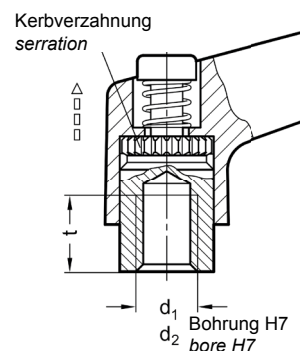

mm



l_1	d_1 Ø Gewinde / thread	d_2 H7 Ø Bohrung / hole	d_3 Ø	d_4 Ø	h_1	h_2	h_3	h_4 Rastweg groove-way	t min.	kg Form AS		
030	M03	-	10,0	13,0	24,5	4,0	31	3,5	7	0,025	-	-
030	M04 / M05 / M06	B05 / B06	10,0	13,0	24,5	4,0	31	3,5	8	0,031	0,030	0,029
045	M04 / M05 / M06	B05 / B06	10,0	13,0	24,5	4,0	34	3,5	8	0,041	0,040	0,039
063	M06 / M08	B08	13,5	17,5	31,0	6,5	45	4,0	11	0,090	0,086	-
078	M08 / M10 / M12	B08 / B10	16,0	21,0	36,0	8,0	54	4,0	14	0,141	0,140	0,138
092	M10 / M12	B12	19,0	24,0	43,0	11,0	64	4,0	17	-	0,223	0,216