




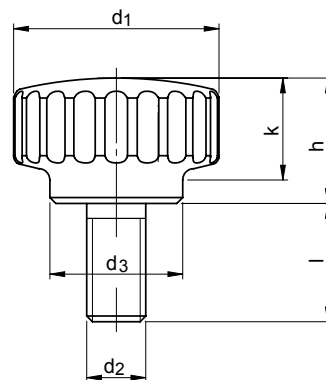

Catalog No.	d ₁	d ₂	X	l	Surface
SM 1255	20	M05	X	16	MT



Edelstahl rostfrei 1.4301
stainless steel 1.4301

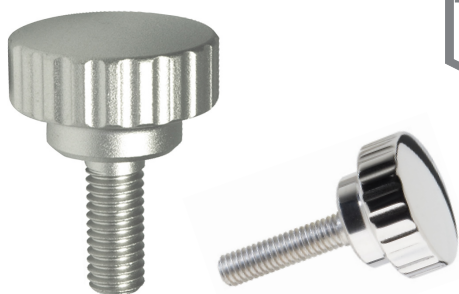

MT: matt gestrahlt / matt blasted
PL: poliert / polished



mm



Besonders geeignet für ein Umfeld mit
hygienischen Anforderungen.



The knurling of the stainless steel-knurled
screws allows a use in an environment with
hygienic requirements.






RoHS
Konform
Compliant



d ₁	d ₂	l	d ₃	h	k	kg
Ø	Ø		Ø			
20	M05	10	14	13	8,5	0,026
		16				0,027
24	M06	16	16	15	10,5	0,043
		20				0,044
		25				0,045
28	M08	16	18	17	12,5	0,068
		20				0,069
		30				0,072

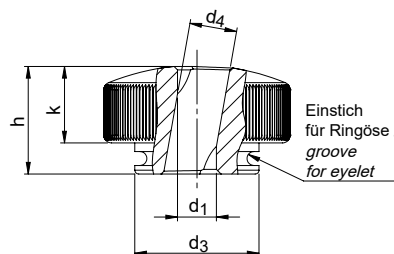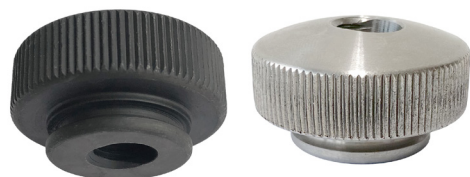

Einstich für Ringöse /
groove for eyelet



Catalog No.	d ₁	Material
SM 1259	M06	ST



ST: Stahl, Festigkeitsklasse 5, brüniert
NI: Edelstahl rostfrei 1.4305, matt gestrahlt

ST: steel, grade 5, blackened
NI: stainless steel 1.4305, matte shot-blasted



mm



= SM 1196 [334](#)

= SM 1196-2 [335](#)



RoHS
Konform
Compliant



d ₁	d ₂	d ₃	d ₄	h	k	kg
Für Schrauben For screws	Ø	Ø	Ø			
M05	20	14	5,3	12	8	0,026
M06	24	16	6,7	14	10	0,037
M08	30	20	8,7	17	12	0,074
M10	36	28	11,0	20	14	0,135
M12	40	32	13,0	24	16	0,180