

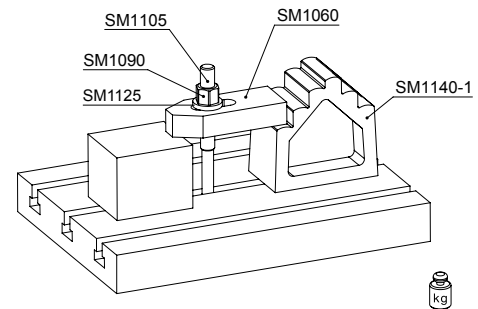


## Treppenbock

*Step block / Stepped packing block*

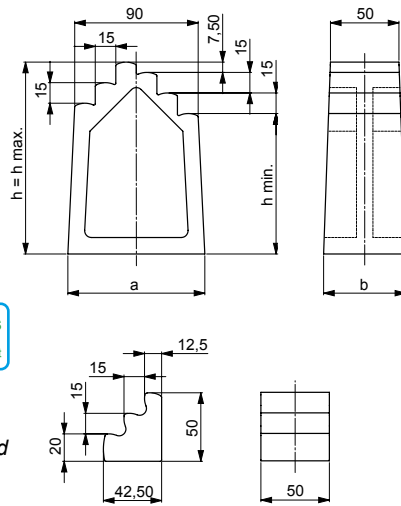

|                    |            |
|--------------------|------------|
| <b>Catalog No.</b> | <b>h</b>   |
| <b>SM 1140-1</b>   | <b>230</b> |

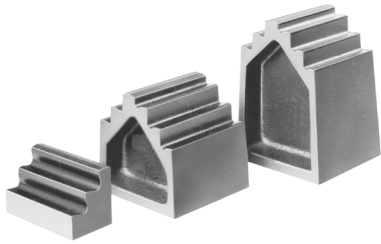

**✓ RoHS**  
Konform  
Compliant





Spezial-Maschinenguss,  
lackiert, Standfläche und Treppe plangefräst  
*special machine casting, varnished, base and  
step faces milled*



mm

| h   | h min. - h max. | a     | b  | kg    |
|-----|-----------------|-------|----|-------|
| 050 | 12,5 - 50,0     | 42,5  | 50 | 0,500 |
| 095 | 57,5 - 95,0     | 95,0  | 55 | 1,600 |
| 140 | 102,5 - 140,0   | 100,0 | 60 | 2,000 |
| 185 | 147,5 - 185,0   | 105,0 | 65 | 2,900 |
| 230 | 192,5 - 230,0   | 110,0 | 70 | 3,600 |
| 275 | 237,5 - 275,0   | 115,0 | 75 | 4,300 |
| 320 | 282,5 - 320,0   | 120,0 | 80 | 5,200 |

# SM 1140-4

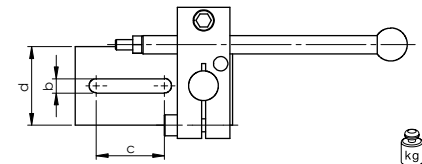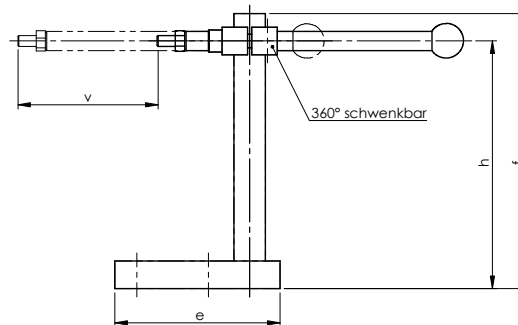

|                    |             |
|--------------------|-------------|
| <b>Catalog No.</b> | <b>Size</b> |
| <b>SM 1140-4</b>   | <b>2</b>    |



mm



Stahl, vergütet  
*steel, tempered*





Positionierung von Werkstücken auf verschiedensten Werkzeugmaschinen und Schraubstöcken, große Höhen- und Längenverstellung, Klemmung mittels mitgeliefertem Sechskant-Quergriff-Schraubendreher.

*Suitable for positioning workpieces on various machine tools and vices. It has a wide range for height- and length adjustment. Setting is done with the T-handle hexagon key attached.*

| Größe<br><i>size</i> | b  | c  | d  | e   | f   | h        | v   | Nut                    | kg    |
|----------------------|----|----|----|-----|-----|----------|-----|------------------------|-------|
| 2                    | 11 | 52 | 60 | 120 | 200 | 30 - 190 | 140 | 10, 12, 14, 16, 18     | 2,450 |
| 3                    | 17 | 73 | 80 | 160 | 200 | 30 - 190 | 140 | 16, 18, 20, 22, 24, 28 | 3,250 |

## SM 1286

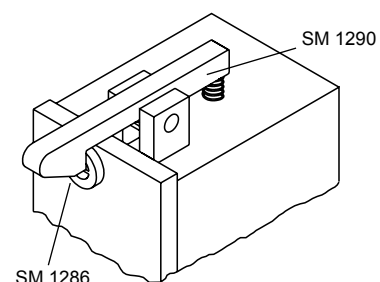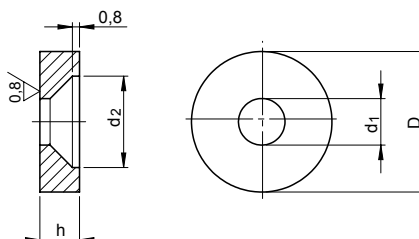

|             |  |    |
|-------------|--|----|
| Catalog No. |  | D  |
| SM 1286     |  | 12 |

Spezialstahl  
*special steel*

gehärtet, brüniert und Unterseite geschliffen  
hardened, blackened, underside ground



mm



**✓ RoHS**  
Konform  
Compliant

| D  | d <sub>1</sub> | d <sub>2</sub> | h     | kg    |
|----|----------------|----------------|-------|-------|
| Ø  | Ø              | Ø              | + 0,1 |       |
| 12 | 4,3            | 8,3            | 2,5   | 0,002 |
| 16 | 5,3            | 10,4           | 4,5   | 0,005 |