


SM 1137-3

DIN 6885 A / ISO 773

Passfeder

Parallel key

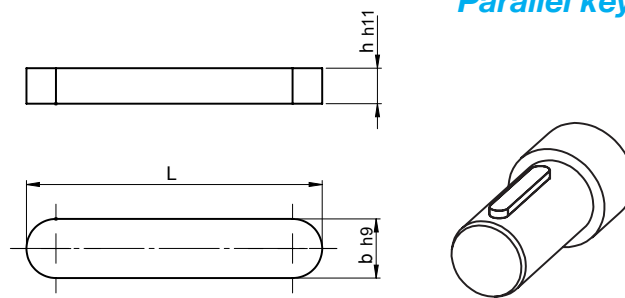

Catalog No. SM 1137-3 **b** X **h** X **L** **Material**
08 X 05 X 20 ST



ST: Stahl C45+C, blank
NI: Edelstahl rostfrei 1.4571
ST: steel C45+C, bright
NI: stainless steel 1.4571



Kanten gerundet
rounded corners



weitere Größen
other dimensions



mm





b	h	L																				für Wellen for shaft Ø
02	02	ST	06	08	10	12	14	15	16	18	20	-	-	-	-	-	-	-	-	-	-	6 ... 8
03	03	ST	06	08	10	12	14	16	18	20	22	25	28	30	32	35	36	-	-	-	-	8 ... 10
		NI	06	08	10	12	14	16	18	20	-	-	-	-	-	-	-	-	-	-	-	
04	04	ST	06	08	10	12	14	16	18	20	22	25	28	32	36	40	45	-	-	-	-	10 ... 12
		NI	-	-	10	12	14	16	18	20	22	25	28	32	-	-	-	-	-	-	-	
05	05	ST	-	08	10	12	14	16	18	20	22	25	28	32	36	40	45	50	-	-	-	12 ... 17
		NI	-	-	10	12	14	16	18	20	22	25	28	32	36	40	45	50	-	-	-	
06	06	ST	-	-	-	12	14	16	18	20	22	25	28	32	36	40	45	50	56	63	-	17 ... 22
		NI	-	-	-	-	14	16	18	20	22	25	28	32	36	40	45	50	56	63	-	
08	07	ST	-	-	-	12	14	16	18	20	22	25	28	32	36	40	45	50	56	63	70	22 ... 30
		NI	-	-	-	-	-	16	18	20	22	25	28	32	36	40	45	50	56	63	-	
10	08	ST	-	-	-	-	-	16	18	20	22	25	28	32	36	40	45	50	56	63	70	30 ... 38
		NI	-	-	-	-	-	-	20	22	25	28	32	36	40	45	50	56	63	70	80	
12	08	ST	-	-	-	-	-	-	-	20	-	25	28	32	36	40	45	50	56	63	70	38 ... 44
		NI	-	-	-	-	-	-	-	-	-	25	28	32	36	40	45	50	56	63	70	
14	09	ST	-	-	-	-	-	-	-	-	-	-	-	-	36	40	45	50	56	-	-	

SM 1137-4

DIN 6888 / ISO 3912

Scheibenfeder

Disc key



Catalog No. SM 1137-4 **b** X **h** **Material**
02 X 03.7 ST



ST: Stahl C45+C, blank
ST: steel C45+C, bright



mm



b	h	d ₁ Ø	L	für Wellen for shaft Ø	kg
01	01,4	4	3,82	3 ... 4	0,001
01,5	02,6	7	6,76	4 ... 6	0,001
02	02,6	7	6,76	6 ... 8	0,001
02	03,7	10	9,66	6 ... 8	0,001
02	05,0*	13	12,65	-	0,001
02,5	03,7	10	9,66	8 ... 10	0,001
02,5	05,0*	13	12,65	-	0,001
03	03,7	10	9,66	8 ... 10	0,001
03	05,0	13	12,65	8 ... 10	0,001
03	06,5	16	15,72	-	0,002
03	07,5*	19	18,57	-	0,003
04	05,0	13	12,65	10 ... 12	0,002
04	06,5	16	15,72	10 ... 12	0,002
04	07,5	19	18,57	-	0,003
04	09,0*	22	21,63	-	0,005
05	06,5	16	15,72	12 ... 17	0,003

b	h	d ₁ Ø	L	für Wellen for shaft Ø	kg
05	07,5	19	18,57	12 ... 17	0,004
05	09,0	22	21,63	-	0,006
05	10,0*	25	24,49	-	0,007
06	07,5	19	18,57	17 ... 22	0,005
06	09,0	22	21,63	17 ... 22	0,007
06	10,0	25	24,49	17 ... 22	0,009
06	11,0	28	27,35	-	0,011
06	13,0*	32	31,43	-	0,012
07	10,0*	25	24,49	-	0,010
08	09,0	22	21,63	22 ... 30	0,011
08	11,0	28	27,35	22 ... 30	0,014
08	13,0	32	31,43	-	0,019
08	16,0*	45	43,08	-	0,030
10	11,0	28	27,35	30 ... 38	0,021
10	13,0	32	31,43	30 ... 38	0,024
10	16,0	45	43,08	-	0,040

* nicht in der DIN enthalten
* not part of the German Standard

