

Form A



Catalog No.	Form	d ₁
SM 1270-2	A	M06



Form A:

Kugelelement: Vergütungsstahl, vergütet, brüniert
Teller: Vergütungsstahl, vergütet, brüniert

Form DN:

Kugelelement: Edelstahl rostfrei 1.4305
Teller: Thermoplast (POM), weiß

Form NI:

Kugelelement: Edelstahl rostfrei 1.4305
Teller: Edelstahl rostfrei 1.4305

Form A:

ball bearing: heat-treated steel, tempered, blackened
pad: heat-treated steel, tempered, blackened

Form DN:

ball bearing: stainless steel 1.4305
pad: Thermoplast (POM), white

Form NI:

ball bearing: stainless steel 1.4305
pad: stainless steel 1.4305




Verwendung als Füße und Druckstücke. Sie können mit den meisten Schraubensorten verbunden werden.

Temperatureinsatzbereich Thermoplastausführung von - 30 °C bis + 80 °C.

To be used as feet and thrust pads. They can be joint with most types of screws.
Temperature application range Thermoplast version from - 30 °C to + 80 °C.



mm

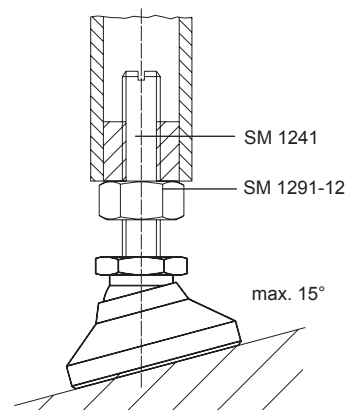

d ₁	d ₂	SW	h ₁	h ₂	t	F max [kN]			kg	
Ø	Ø					A	DN	NI	A / NI	DN
M06	20	10	14	2,5	5,0	10	4	8	0,017	0,008
M08	25	13	18	4,0	7,0	18	7	14	0,037	0,013
M10	32	17	22	5,0	9,0	20	10	16	0,066	0,026
M12	40	19	26	6,0	11,0	35	18	28	0,112	0,040
M16	50	24	32	7,0	13,5	45	20	36	0,220	0,075
M20	60	30	42	8,0	17,0	55	22	44	0,413	0,150
M24	60	36	45	9,5	19,0	65	25	52	0,463	0,185

F = Belastbarkeit bei statischer Belastung /
F = Load capacity for static load