



SM 1291-01 _____ Zylinderschraube mit Innensechskant, niedriger Kopf DIN 6912 Hexagon socket head cap screw, shallow head

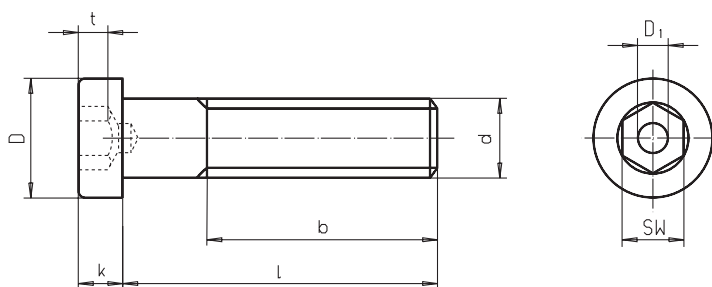

Catalog No.	d	X	l	Material
SM 1291-01	M08	X	30	ST

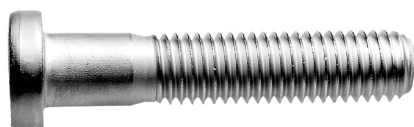

ST: Stahl, verzinkt
steel, zinc plated



Festigkeitsklasse 8.8
grade 8.8



mm



✓RoHS
Konform
Compliant




Reinigen mit
SM 1306
Clean with



Kleben mit
SM 1301
Lock with

b	14	16	18	22	26	30
D Ø	7,0	8,5	10,0	13,0	16,0	18,0
k	2,8	3,5	4,0	5,0	6,5	7,5
D ₁ Ø	2,0	2,5	3,0	4,0	5,0	6,0
SW	03	04	05	06	08	10
t	1,48	1,88	2,38	2,88	3,35	3,85
l	d					
08	M04	M05	M06	-	-	-
10	M04	M05	M06	M08	-	-
12	M04	M05	M06	M08	-	-
16	M04	M05	M06	M08	M10	-
20	M04	M05	M06	M08	M10	M12
25	M04	M05	M06	M08	M10	M12
30	-	M05	M06	M08	M10	M12
35	-	-	M06	M08	M10	M12
40	-	-	M06	M08	M10	M12
45	-	-	M06	M08	M10	M12
50	-	-	M06	M08	M10	M12
60	-	-	M06	M08	M10	M12
70	-	-	-	M08	M10	M12

SM 1291-02 _____ Sechskantschraube mit Schaft DIN 931 / ISO 4014 Hexagon head screw, metric coarse thread

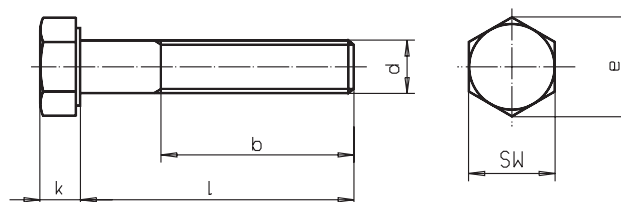

Catalog No.	d	X	l	Material
SM 1291-02	M08	X	035	ST



ST: Stahl, verzinkt
steel, zinc plated



Festigkeitsklasse 8.8
grade 8.8



mm



* In Edelstahl rostfrei sind diese Längen
nicht erhältlich.
In stainless steel not available.

** Schlüsselweite nach DIN ISO 272
Widths across flats, external like DIN ISO 272.



, andere Abmessungen
, other dimensions



✓RoHS
Konform
Compliant



Reinigen mit
SM 1306
Clean with



Kleben mit
SM 1301
Lock with

b	14	16	18	22	26	30
SW	07	08	10	13	17**	19**
e	7,66	8,79	11,05	14,38	18,90	21,10
k	2,8	3,5	4,0	5,3	6,4	7,5
l	d					
025	M04	M05*	-	-	-	-
030	M04	M05	M06	-	-	-
035	M04	M05	M06	M08	-	-
040	M04	M05	M06	M08	M10	-
045	M04	M05*	M06	M08	M10	M12
050	-	M05	M06	M08	M10	M12
060	-	M05	M06	M08	M10	M12
070	-	-	M06	M08	M10	M12
080	-	-	-	M08	M10	M12
090	-	-	-	-	M10	M12
100	-	-	-	-	M10	M12
110	-	-	-	-	-	M12
120	-	-	-	-	-	M12