



# SM 1291-01 \_\_\_\_\_ Zylinderschraube mit Innensechskant, niedriger Kopf DIN 6912 Hexagon socket head cap screw, shallow head

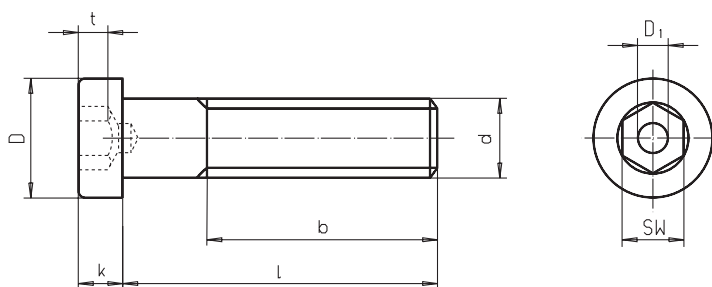

| Catalog No. | d   | X | l  | Material |
|-------------|-----|---|----|----------|
| SM 1291-01  | M08 | X | 30 | ST       |

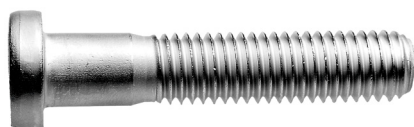

ST: Stahl, verzinkt  
steel, zinc plated



Festigkeitsklasse 8.8  
grade 8.8



mm



✓RoHS  
Konform  
Compliant




Reinigen mit  
**SM 1306**  
Clean with



Kleben mit  
**SM 1301**  
Lock with

| b                | 14     | 16   | 18   | 22   | 26   | 30   |
|------------------|--------|------|------|------|------|------|
| D Ø              | 7,0    | 8,5  | 10,0 | 13,0 | 16,0 | 18,0 |
| k                | 2,8    | 3,5  | 4,0  | 5,0  | 6,5  | 7,5  |
| D <sub>1</sub> Ø | 2,0    | 2,5  | 3,0  | 4,0  | 5,0  | 6,0  |
| SW               | 03     | 04   | 05   | 06   | 08   | 10   |
| t                | 1,48   | 1,88 | 2,38 | 2,88 | 3,35 | 3,85 |
| l                | d<br>Ø |      |      |      |      |      |
| 08               | M04    | M05  | M06  | -    | -    | -    |
| 10               | M04    | M05  | M06  | M08  | -    | -    |
| 12               | M04    | M05  | M06  | M08  | -    | -    |
| 16               | M04    | M05  | M06  | M08  | M10  | -    |
| 20               | M04    | M05  | M06  | M08  | M10  | M12  |
| 25               | M04    | M05  | M06  | M08  | M10  | M12  |
| 30               | -      | M05  | M06  | M08  | M10  | M12  |
| 35               | -      | -    | M06  | M08  | M10  | M12  |
| 40               | -      | -    | M06  | M08  | M10  | M12  |
| 45               | -      | -    | M06  | M08  | M10  | M12  |
| 50               | -      | -    | M06  | M08  | M10  | M12  |
| 60               | -      | -    | M06  | M08  | M10  | M12  |
| 70               | -      | -    | -    | M08  | M10  | M12  |

# SM 1291-02 \_\_\_\_\_ Sechskantschraube mit Schaft DIN 931 / ISO 4014 Hexagon head screw, metric coarse thread

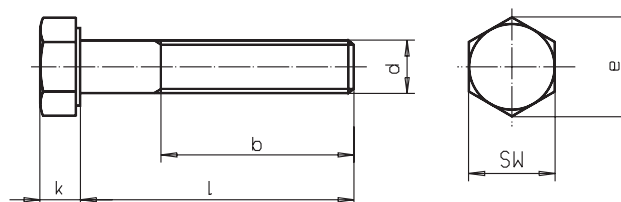

| Catalog No. | d   | X | l   | Material |
|-------------|-----|---|-----|----------|
| SM 1291-02  | M08 | X | 035 | ST       |



ST: Stahl, verzinkt  
steel, zinc plated



Festigkeitsklasse 8.8  
grade 8.8



mm



\* In Edelstahl rostfrei sind diese Längen  
nicht erhältlich.  
In stainless steel not available.

\*\* Schlüsselweite nach DIN ISO 272  
Widths across flats, external like DIN ISO 272.



, andere Abmessungen  
, other dimensions



✓RoHS  
Konform  
Compliant



Reinigen mit  
**SM 1306**  
Clean with



Kleben mit  
**SM 1301**  
Lock with

| b   | 14     | 16   | 18    | 22    | 26    | 30    |
|-----|--------|------|-------|-------|-------|-------|
| SW  | 07     | 08   | 10    | 13    | 17**  | 19**  |
| e   | 7,66   | 8,79 | 11,05 | 14,38 | 18,90 | 21,10 |
| k   | 2,8    | 3,5  | 4,0   | 5,3   | 6,4   | 7,5   |
| l   | d<br>Ø |      |       |       |       |       |
| 025 | M04    | M05* | -     | -     | -     | -     |
| 030 | M04    | M05  | M06   | -     | -     | -     |
| 035 | M04    | M05  | M06   | M08   | -     | -     |
| 040 | M04    | M05  | M06   | M08   | M10   | -     |
| 045 | M04    | M05* | M06   | M08   | M10   | M12   |
| 050 | -      | M05  | M06   | M08   | M10   | M12   |
| 060 | -      | M05  | M06   | M08   | M10   | M12   |
| 070 | -      | -    | M06   | M08   | M10   | M12   |
| 080 | -      | -    | -     | M08   | M10   | M12   |
| 090 | -      | -    | -     | -     | M10   | M12   |
| 100 | -      | -    | -     | -     | M10   | M12   |
| 110 | -      | -    | -     | -     | -     | M12   |
| 120 | -      | -    | -     | -     | -     | M12   |