





Catalog No.	Code	Direction	Material
SM 1291.21	.005	R	NI

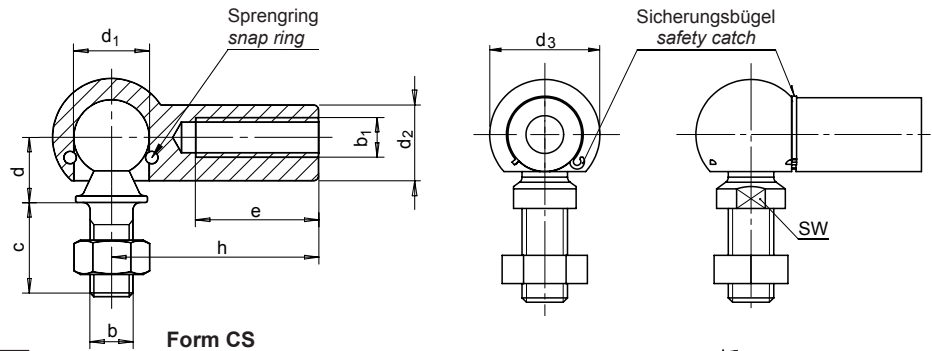

ST: Stahl, verzinkt / steel, zinc plated
NI: Edelstahl rostfrei, 1.4305 / stainless steel

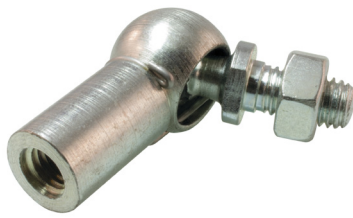

mm



Form CS: mit Sicherungsbügel und Sechskantmutter, Schwenkwinkel 15°

R = Rechtsgewinde
L = Linksgewinde

Form CS: with hexagon nut and safety bar, angle of rotation 15°

R = right-hand thread
L = left-hand thread




M04 aus Kunststoff (Kugelpfanne POM)

M04 plastic (ball socket POM)




✓RoHS
Konform
Compliant

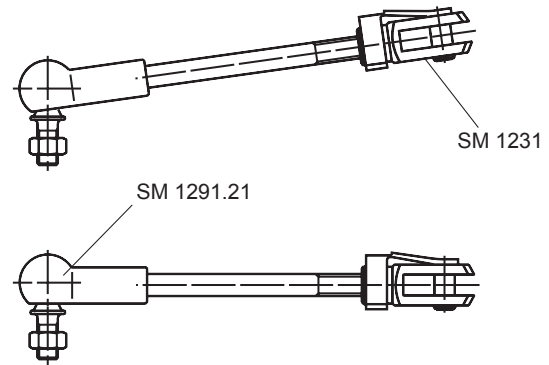

Code	b ₁ Ø	c	d ±0,3	d ₁ Ø Kugel h9	d ₂ Ø	d ₃ Ø ±0,5	e min.	h ±0,3	SW	kg
005	M05	10,2	09	08	08	12,8	10,2	22	07	0,015
010	M06	12,5	11	10	10	14,8	11,5	25	08	0,025
015	M08	16,5	13	13	13	19,3	14,0	30	11	0,053
020	M10	20,0	16	16	16	24,0	15,5	35	13	0,104
025	M12	20,0	16	16	16	24,0	15,5	35	13	0,104
030	M14x1,5	28,0	20	19	22	30,0	21,5	45	16	0,221
035	M14x2,0	28,0	20	19	22	30,0	21,5	45	16	0,221
040	M16	28,0	20	19	22		21,5	45	16	0,221

SM 1291.22 Dichtungskappe für Winkelgelenk SM 1291.21

Dust cap for angle ball joint

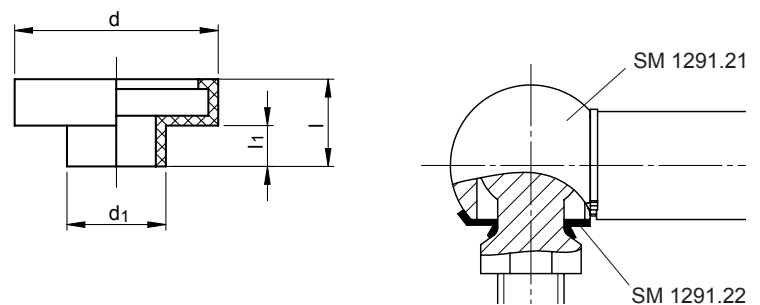

Catalog No.	d
SM 1291.22	12,0



✓RoHS
Konform
Compliant



Gummi, schwarz / rubber, black



Schutz vor Eindringen von Schmutz in Winkelgelenke SM 1291.21.
Temperatureinsatzbereich bis 110°C.

Protection against penetration of dirt in angle joints SM 1291.21.
Temperature range up to 110°C.



mm

d Ø	d ₁ Ø	l	l ₁	für Winkelgelenke / for angle joints SM 1291.21	kg
12,0	5,5	4,5	1,5	SM 1291.21.005	0,001
13,5	7,0	6,5	3,5	SM 1291.21.010	0,001
17,5	8,5	7,5	3,5	SM 1291.21.015	0,001
22,0	10,5	8,5	4,5	SM 1291.21.020 / 025	0,002
25,5	12,5	12,5	7,0	SM 1291.21.030 / 035 / 040	0,002