




Catalog No.	b	X	I	Material / Colour
SM 1269-3	20	X	100	SW

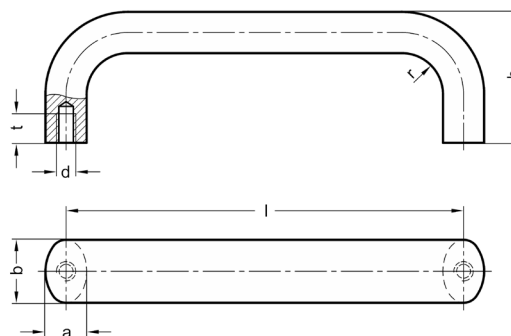

Aluminium

NI: Edelstahl rostfrei 1.4301, matt gestrahlt

NI: stainless steel 1.4301, matt



Sonderausführungen: Sonderlängen.
Hergestellt aus gezogenem Aluminiumprofil, zeichnen sich die Bügelgriffe durch Stabilität und ergonomische Formgebung aus.

Zusätzlich zur Standardoberfläche sind diese Bügelgriffe mit einer Funktionsbeschichtung aus einem hochwetterfesten und UV-beständigen Pulverlacksystem erhältlich. Damit sind sie ausgezeichnet für den Außeneinsatz geeignet.

Special versions: special lengths.

Made of drawn aluminium profile, the handles are characterized by stability and ergonomic design.

In addition to the standard surface, these handles are available with a functional coating of a highly weather-resistant and UV-resistant powder coating system. This makes them ideal for outdoor use.



Aluminium

BL = blank, gleitgeschliffen / bright

EL = eloxiert, natur / anodized, natural

kunststoffbeschichtet, strukturmatt / plastic coated, textured finish:

SW = schwarz / black

RT = rot / red

SR = silber / silver

RAL 9005

RAL 3000

RAL 9006



mm



b	l ₁ ±0,25	Oberfläche / Farbe surface / colour		a	d Ø	h	t	r	kg	
		AL	NI						AL	NI
20	100	BL / EL / SW / RT / SR	-	13	M06	49	10	13	0,086	-
	112	BL / EL / SW / RT / SR	NI			49			0,094	0,294
	117	BL / EL / SW / RT / SR	-			49			0,100	-
	120	BL / EL / SW / RT / SR	-			49			0,105	-
	128	BL / EL / SW / RT / SR	NI			51			0,109	0,310
	160	BL / EL / SW / RT / SR	NI			51			0,125	0,360
	180	BL / EL / SW / RT / SR	-			51			0,128	-
	200	BL / EL / SW / RT / SR	NI			51			0,151	0,440
	235	BL / EL / SW / RT / SR	-			51			0,180	-
	250	-	NI			51			-	0,517
	300	-	NI			51			-	0,597
	400	-	NI			51			-	0,735
26	112	BL / EL / SW / RT / SR	-	17	M08	55	12	17	0,160	-
	117	BL / EL / SW / RT / SR	-			55			0,166	-
	120	BL / EL / SW / RT / SR	-			55			0,176	-
	125	BL / EL / SW / RT / SR	-			55			0,180	-
	128	BL / EL / SW / RT / SR	NI			55			0,185	0,520
	160	BL / EL / SW / RT / SR	NI			57			0,210	0,600
	179	BL / EL / SW / RT / SR	-			57			0,234	-
	192	BL / EL / SW / RT / SR	-			57			0,265	-
	200	-	NI			57			-	0,715
	300	BL / EL / SW / RT / SR	NI			57			0,345	0,990
	400	BL / EL / SW / RT / SR	NI			57			0,440	1,260
	500	BL / EL / SW / RT / SR	NI			57			0,538	1,525