

| Catalog No. | Size |
|-------------|------|
| SM 2205     | 02   |



Stahl, vergütet, verzinkt und passiviert,  
Festigkeitsklasse 8.8, mit zwei Muttern.  
Mit abnehmbarer Schutzkappe.

steel tempered, tensile strength class 8.8,  
galvanized and passivated with two nuts.  
With removable protection cap.



mm



| Größe<br>Size | DIN 933   | h    |      | L   | kg    |
|---------------|-----------|------|------|-----|-------|
|               |           | min. | max. |     |       |
| 01            | M05 x 30  | 14   | 25   | 38  | 0,010 |
| 02            | M06 x 35  | 17   | 25   | 45  | 0,020 |
| 03            | M08 x 45  | 22   | 32   | 58  | 0,035 |
| 04            | M08 x 65  | 22   | 52   | 78  | 0,040 |
| 05            | M12 x 80  | 30   | 60   | 98  | 0,130 |
| 06            | M12 x 110 | 30   | 88   | 128 | 0,160 |
| 08            | M16 x 120 | 25   | 84   | 130 | 0,280 |




Reinigen mit  
SM 1306  
Clean with



Sichern mit  
SM 1301  
Lock with

### Anwendungsmöglichkeiten / Examples:

| Andrückschraube<br>Clamping screw<br>Größe / Size | SM 2030 | SM 2040 | SM 2050 | SM 2060 | SM 2070 |
|---------------------------------------------------|---------|---------|---------|---------|---------|
| 01                                                | -       | -       | 1       | -       | -       |
| 02                                                | -       | -       | -       | 2       | 2       |
| 03                                                | 3       | 3       | -       | -       | -       |
| 04                                                | 4       | 4       | -       | -       | -       |
| 05                                                | 5       | 5       | -       | 5 + 6   | -       |
| 06                                                | 6       | 6       | -       | -       | -       |
| 08                                                | -       | -       | -       | 8       | -       |

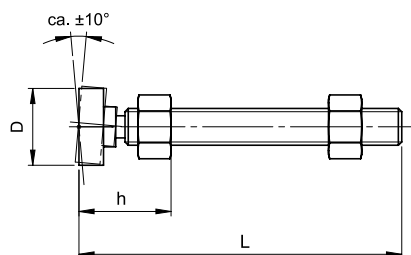

| Catalog No. | Size |
|-------------|------|
| SM 2210     | 4    |



Stahl, vergütet, verzinkt und passiviert  
steel tempered, galvanized and passivated



mm



| Größe<br>Size | DIN 6332  | D<br>Ø | L   | h    |      | kg    |
|---------------|-----------|--------|-----|------|------|-------|
|               |           |        |     | min. | max. |       |
| 1             | M05 x 35  | 12     | 37  | 8    | 23   | 0,009 |
| 4             | M08 x 75  | 16     | 78  | 16   | 52   | 0,042 |
| 6             | M12 x 100 | 25     | 105 | 30   | 61   | 0,138 |



Reinigen mit  
SM 1306  
Clean with



Sichern mit  
SM 1301  
Lock with

### Anwendungsmöglichkeiten / Examples:

| Andrückschraube<br>Clamping screw<br>Größe / Size | SM 2030 | SM 2040 | SM 2050 | SM 2060   | SM 2070   |
|---------------------------------------------------|---------|---------|---------|-----------|-----------|
| 1                                                 | -       | -       | 1       | -         | -         |
| 4                                                 | 3 + 4   | 3 + 4   | -       | -         | -         |
| 6                                                 | 6       | 6       | -       | 4 + 6 + 8 | 4 + 6 + 8 |