



Catalog No. **d₁** **X** **l₁** **Surface**

SM 1265-10 M05 X 16 MT



Edelstahl rostfrei 1.4404 (A4)
Dichtring:
Hydrierter Acrylnitril-Butadien-
Kautschuk (H-NBR)
temperaturbeständig -25 °C bis +150 °C
Härte 85 ±5 Shore A
FDA-konform

stainless steel 1.4404 (A4) AISI 316 L

sealing ring:

*hydrogenated acrylonitrile butadiene
rubber (H-NBR) temperature resistant
-25 °C to +150 °C*

Hardness 85±5 Shore A

FDA compliant



PL: poliert / polished (Ra < 0,8 µm)
MT: mattiert / matte (Ra < 0,8 µm)



Hygienic Design

Diese Schrauben aus rostfreiem Edelstahl sind nach den Richtlinien der EHEDG zertifiziert und daher besonders für den Einsatz in Hygienebereichen geeignet. Die dichtende Flanschfläche ermöglicht eine totraumfreie Befestigung. Die hohe Oberflächengüte und große Eckradien verhindern das Anhaften von Schmutz und erleichtern die Reinigung.

Hygienic Design

These screws from stainless steel are certified according to EHEDG guidelines and are therefore particularly suitable for use in hygienic areas.. The sealed mounting surface enables mounting without dead spaces. The high quality finish as well as the large corner radii prevent adherence of dirt and facilitate cleaning.

passende Ersatzdichtringe sind /
suitable replacement sealing rings are:


SM 1291-15 12X08,
SM 1291-15 14X10,
SM 1291-15 18X14 und
SM 1291-15 21X17.



mm



- Dichtring: EPDM
temperaturbeständig -40 °C bis +120 °C
- sealing ring: EPDM
temperature resistant -40 °C to +120 °C

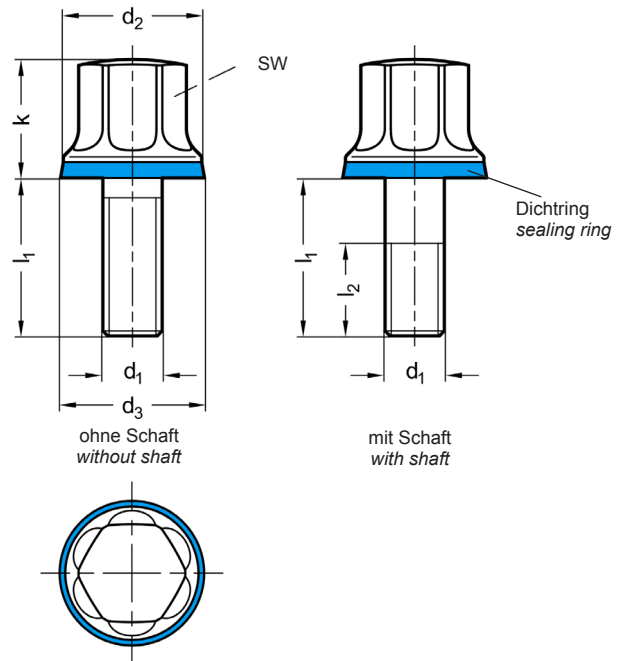

d ₁	l ₁		d ₂	d ₃	k	l ₂	sw	kg
Ø	ohne Schaft without shaft	mit Schaft with shaft	Ø	Ø				
M04	8	-	11	11,8	9,5	14	7	0,005
	10	-						0,005
	12	-						0,006
	-	16						0,013
M05	10	-	12	12,8	10	16	8	0,009
	16	-						0,010
	-	20						0,011
M06	12	-	14	14,8	12	18	10	0,013
	16	-						0,014
	20	-						0,015
	25	-						0,017
	-	30						0,019
M08	16	-	18	18,8	14,5	22	13	0,024
	20	-						0,026
	25	-						0,028
	30	-						0,030
	-	40						0,033
M10	20	-	21	21,8	18	26	16	0,049
	25	-						0,0