


																	
d ₁	d ₂	l ₁	kg	l ₁	kg	l ₁	kg	l ₁	kg	d ₃	d ₄	k	l ₂	l ₃	SW ₁	SW ₂	Stat. Belastbarkeit
Ø	Ø	Form A				Form B				Ø	Ø						static load [kN]
060	M12	175	0,896	225	0,940	-	-	-	-	25	-	-	14	35	17	19	16
	M16	175	0,955	225	1,036	-	-	-	-	28	-	-	19	35	18	22	30
080	M12	175	0,906	225	0,950	175	1,110	225	1,154	25	9,5	55,5	14	35	17	19	16
	M16	175	0,978	225	1,045	175	1,170	225	1,250	28	9,5	55,5	19	35	18	22	30
	M20	185	1,176	235	1,489	185	1,383	235	1,437	32	9,5	55,5	24	35	24	27	47
	M24	185	1,341	235	1,520	185	1,547	235	1,725	36	9,5	55,5	29	35	24	30	67
100	M16	175	1,141	225	1,222	175	1,095	225	1,176	28	12	69	19	35	18	22	30
	M20	185	1,352	235	1,665	185	1,306	235	1,419	32	12	69	24	35	24	27	47
	M24	185	1,518	235	1,697	185	1,472	235	1,651	36	12	69	29	35	24	30	67
120	M16	175	1,451	225	1,532	175	1,405	225	1,586	28	12	89	19	35	18	22	30
	M20	185	1,662	235	1,975	185	1,616	235	1,829	32	12	89	24	35	24	27	47
	M24	185	1,828	235	2,007	185	1,782	235	1,961	36	12	89	29	35	24	30	67

SM 3151

Abdeckhülse Edelstahl rostfrei, HYGIENIC DESIGN
Cover sleeve, stainless steel

Catalog No.	d ₁	X	l ₁
SM 3151	M20	X	68

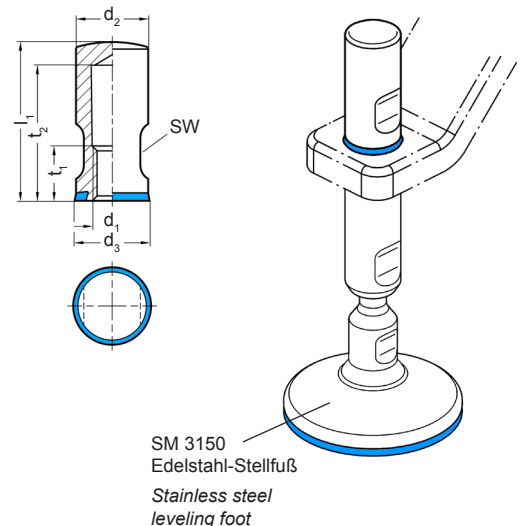

Edelstahl rostfrei 1.4301
Dichtring:
Hydrierter Acrylnitril-Butadien-
Kautschuk (H-NBR)
temperaturbeständig -25 °C bis +150 °C
Härte 85 ±5 Shore A
FDA-konform

stainless steel 1.4301
sealing ring:
hydrogenated acrylonitrile butadiene
rubber (H-NBR)
temperature resistant -25 °C to +150 °C
Hardness 85±5 Shore A
FDA compliant



- Dichtring: EPDM
temperaturbeständig -40 °C bis +120 °C
- sealing ring: EPDM
temperature resistant -40 °C to +120 °C



passende Ersatzdichtringe sind /
suitable replacement sealing rings are:
SM 1291-15 25X21,
SM 1291-15 28X24,
SM 1291-15 32X28 und / and
SM 1291-15 36X32.



mm

**Hygienic Design**

Diese Abdeckhülsen aus rostfreiem Edelstahl sind nach den Richtlinien der EHEDG, 3-A Sanitary Standards, Inc. und DGUV Test zertifiziert und daher besonders für den Einsatz in Hygienebereichen geeignet.

Mit ihnen werden vorstehende Außengewinde abgedeckt und gleichzeitig Kontermuttern ersetzt. Die gedichteten Anschraubflächen ermöglichen eine tottraumfreie Befestigung. Die hohe Oberflächengüte verhindert das Anhaften von Schmutz bzw. erleichtert die Reinigung.

Hygienic Design

These stainless steel cover sleeves are certified according to EHEDG, 3-A Sanitary Standards, Inc. and DGUV Test guidelines and are therefore ideal for use in hygienic areas.

They cover protruding external threads and replace lock nuts at the same time. The sealed screw-on surfaces enable fastening without dead space. The high surface quality prevents dirt from adhering and facilitates cleaning.



d ₁ Ø	l ₁	d ₂ Ø	d ₃ Ø	sw	t ₁	t ₂	kg
M12	56	25	25,8	19	15,5	50	0,156
M16	62	28	28,8	22	20,5	55	0,200
M20	68	32	32,8	27	25,5	60	0,272
M24	74	36	36,8	30	30,5	65	0,352