



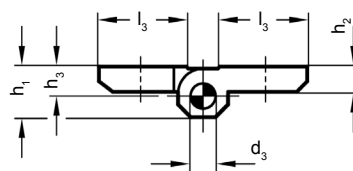


Form A



Form B

Bohrung für Senkschraube
Bore for countersunk screw
DIN 7991



Catalog No.	Form	l ₁	Material
SM 1606	A	40	NI A4



Scharnierkörper:

NI: Edelstahl rostfrei, 1.4308

NIA4: Edelstahl rostfrei, 1.4408
matt gestrahlt

Stift: Edelstahl rostfrei, 1.4404 (A4)

Gewindestift (Form B):

NI: Edelstahl rostfrei, 1.4308,
einstückig gegossen

Hinge:

NI: stainless steel AISI CF-8, 1.4308

NIA4: stainless steel, 1.4408

matte shot-blasted finish

pin: stainless steel AISI 316L, 1.4404 (A4)

Threaded stud (Type B):

NI: stainless steel AISI CF-8, 1.4308,
casted „in one piece“



mm



Form A: Montage über 2 x 2 Bohrungen für Senkschrauben

Form B: Montage über 2 x 2 Gewindestifte

Form A: 2 x 2 bores for countersunk screws

Form B: 2 x 2 threaded studs

Diese Scharniere sind sehr kompakt und stabil.

Mit ihren unterschiedlichen Materialausführungen und mit zwei Befestigungsformen sind sie sehr spezifisch einsetzbar.

These hinges are very compact and stable.

With their different material finishes and in combination with two mounting forms they are very specific applications.



RoHS
Konform
Compliant



l ₁			l ₂	d ₁	d ₂ Ø	d ₃ Ø	h ₁	h ₂	h ₃	h ₄ +0,5	l ₃	l ₄ NI	m ₁	m ₂	kg	
Form A NI	Form B NI A4	Form B NI													Form A	Form B
30	30	-	30	-	4,3	3	7,5	4	4,3	8,6	10,7	-	18	18	0,019	-
40	40	40	40	M5	5,3	4	9,0	5	5,5	11,0	16,0	11	25	25	0,047	0,053
50	50	50	50	M6	6,4	6	11,5	6	6,5	13,0	21,0	13	30	30	0,087	0,093
60	60	60	60	M8	8,3	8	15,0	8	8,5	17,0	26,0	17	36	36	0,160	0,168