




Catalog No.	Form	d ₁	X	k	Colour/Surface
SM 1702	A	30 X 56	SW		

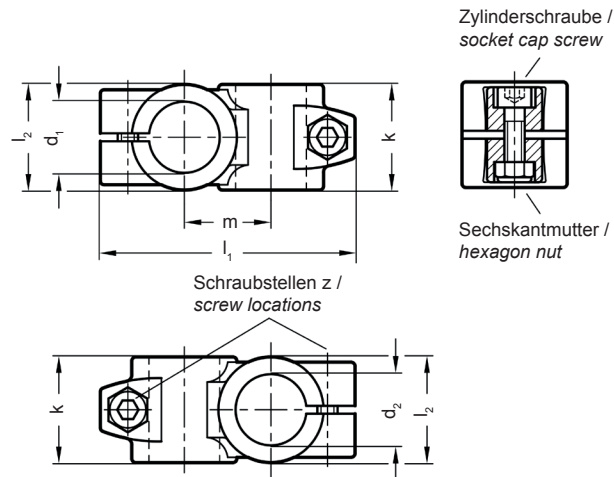

AL: Aluminium

Zylinderschrauben DIN 912:
Edelstahl, nichtrostend 1.4301
Sechskantmutter DIN 985:
Edelstahl, nichtrostend 1.4301
selbstsichernd durch Polyamidring

AL: Aluminium

Socket cap screws DIN 912:
stainless steel 1.4301
Hex nuts DIN 985:
stainless steel 1.4301
Self-locking via polyamide ring



SW = kunststoffbeschichtet
schwarz RAL 9005
strukturmatt /
powder coated
black RAL 9005
textured finish

BL = blank, matt gestrahlt /
plain finish, matte shot-plasted



Form A: ohne Dichtung

Die Klemmbohrungen der Kreuz-Klemmverbinder SM 1702 sind mechanisch bearbeitet und für Konstruktionsrohre SM 1780 bzw. DIN 2391, DIN 2395 und DIN 2462 ausgelegt.

An den Schraubstellen z verkleinern die Zylinderschrauben den Bohrungsquerschnitt zum Klemmen.

Wenn werkzeuglos geklemmt werden soll, können die Zylinderschrauben durch einen in der Tabelle als Zubehör angegebenen verstellbaren Klemmhebel SM 1720 (für Aluminium-Kreuz-Klemmverbinder) ersetzt werden.

Form A: without seal

The clamping holes of the cross clamp connectors SM 1702 are machined and designed for construction pipes SM 1780 or DIN 2391, DIN 2395 and DIN 2462.

At the screw points z, the cheese head screws reduce the bore cross-section for clamping.

If tool-free clamping is required, the cheese head screws can be replaced by an adjustable clamping lever SM 1720 (for aluminum cross-clamp connectors) specified in the table as an accessory.




mm



d₁ = Bohrung / bore
k = Klemmlänge / Clamping length
z = Schraubstellen / Screw location

Zubehör:

empfohlene Klemmhebel SM 1720 für z / Accessory: recommended adjustable hand lever SM 1720 for z

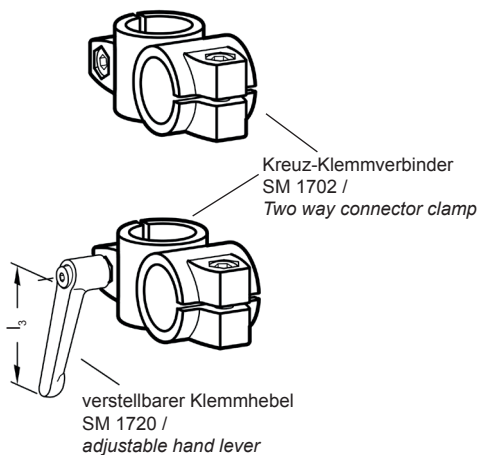

d ₁ Ø	k [mm]	d ₂ Ø	l ₁	l ₂	m	z	SM 1720 Zubehör / Accessory l ₃		kg
20	40	20	97	40	33	M8-25	-	-	0,250
25	40	25				M8-25	63	78	0,220
30	40	30				M8-25	63	78	0,174
30	56	30	125	56	45	M10-35	-	-	0,600
32	56	32				M10-35	-	-	0,620
35	56	35				M10-35	78	92	0,600
40	56	40				M10-35	78	92	0,500
40	65	40				M10-50	-	-	0,890
42	65	42	143	65	53	M10-50	78	92	0,780
45	65	45				M10-50	78	92	0,784
48	65	48				M10-50	78	92	0,750
50	65	50				M10-50	78	92	0,610
50	80	50	169	80	65	M10-50	-	-	1,460
60	80	60				M10-50	78	92	1,060