


Catalog No.	d ₁	X	k	Colour/Surface
SM 1709	20	X	50	SW

- **AL:** Aluminium
Zylinderschrauben DIN 912:
Edelstahl, nichtrostend 1.4301
Sechskantmutter DIN 985:
Edelstahl, nichtrostend 1.4301
selbstsichernd durch Polyamidring
AL: Aluminium
Socket cap screws DIN 912:
stainless steel 1.4301
Hex nuts DIN 985:
stainless steel 1.4301
Self-locking via polyamide ring
- **SW** = kunststoffbeschichtet
schwarz RAL 9005
strukturmatt /
powder coated
black RAL 9005
textured finish
- BL** = blank, matt gestrahlt /
plain finish, matte shot-plasted

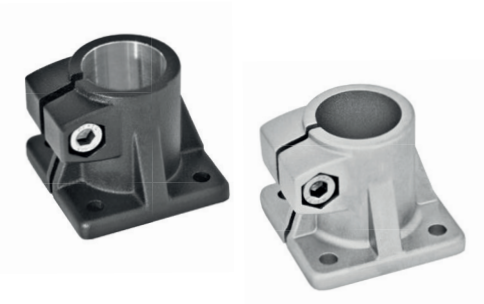


Die Klemmbohrung der Fuß-Klemmverbinder SM 1709 ist mechanisch bearbeitet und für Konstruktionsrohre SM 1780 bzw. DIN 2391, DIN 2395 und DIN 2462 ausgelegt.

An der Schraubstelle z verkleinert die Zylinderschraube DIN 912 den Bohrungsquerschnitt zum Klemmen.

The clamping bore of the SM 1709 foot clamp connector is machined and designed for SM 1780 or DIN 2391, DIN 2395 and DIN 2462 construction tubes.

At the screw point z, the DIN 912 cheese head screw reduces the bore cross-section for clamping.



d₁ = Bohrung / bore
k = Klemmlänge / Clamping length
z = Schraubstelle / Screw location



d ₁ Ø	k [mm]	d ₂ Ø	l ₁	l ₂	t	x ₁	x ₂	y ₁	y ₂	z	kg
20	50	6,5	52	40	7	60	42	60	42	M8-25	0,180
25										M8-25	0,176
30										M8-25	0,150
30	70	8,5	68	56	10	90	64	90	64	M10-35	0,520
32										M10-35	0,505
35										M10-35	0,485
40										M10-35	0,437
40	85	11	77,5	65	14	105	74	105	74	M10-50	0,860
42										M10-50	0,829
45										M10-50	0,777
48										M10-50	0,690
50										M10-50	0,610
60	100	11	92	80	14	125	89	125	89	M10-50	0,975