




Catalog No.	Form	d ₁	Material	Colour/Surface
SM 1715	A	10	AL	SW
SM 1715	B	14	NI	

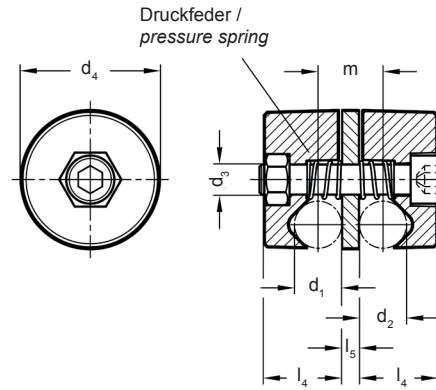

AL: Aluminium
NI: Edelstahl rostfrei 1.4308
matt gestrahlt

Zylinderschrauben DIN 912:
Edelstahl, nichtrostend 1.4301

Sechskantmuttern DIN 934:
Edelstahl, nichtrostend 1.4301

verstellbare Klemmhebel:

- Zink-Druckguss (bei MT / SW)
kunststoffbeschichtet
silber, RAL 9006, strukturmatt
- Edelstahl-Feinguss (NI)
nichtrostend, 1.4308
matt gestrahlt
- Schraubeneinsatz
Edelstahl
nichtrostend, 1.4305

AL: Aluminium
NI: Stainless steel 1.4308
(AISI CF-8)
matte shot-blasted

Socket cap screws DIN 912:
stainless steel 1.4301 (AISI 304)

Hex nuts DIN 934:
stainless steel 1.4301 (AISI 304)


Adjustable hand lever:

- zinc die casting (for MT / SW)
powder coated
silver, RAL 9006, textured finish
- stainless steel precision casting
1.4308 (AISI CF-8) (NI)
stainless, 1.4308
matt shot-blasted
- screw insert, distance bushing
stainless steel 1.4305 (AISI 303)




mm

d₁ / d₂ = Spann-Ø / Clamping Ø



d ₁	d ₂	d ₃	d ₄	l ₁	l ₂	l ₃	l ₄	l ₅	m	kg			
Spann- Ø	Spann- Ø	Ø	Ø							Form A		Form B	
										AL	NI	AL	NI
08	08	M6	28	33	35	45	14	5	13	0,052	0,164	0,085	0,205
10	10	M8	32	45	45	63	20		15	0,095	0,242	0,179	0,335
12	12		36	47	45	63	21		17	0,118	0,297	0,200	0,389
14	14	M10	46	57	55	78	25,5	6	20	0,373	0,461	0,503	0,608
15	15			57	55	78	25,5		21	0,393	0,485	0,526	0,635
16	16			57	55	78	25,5		22	0,224	0,488	0,357	0,638
18	18		56	63	55	78	28,5		24	0,549	0,688	0,628	0,838
20	20			65	55	78	28,5		28	0,630	0,785	0,763	0,935

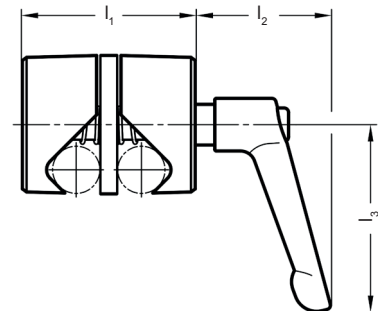

Form A: mit Zylinderschraube DIN 912
Form B: mit verstellbarem Klemmhebel

Gelenk-Klemmverbinder SM 1715 klemmen die Stäbe bzw. Rohre über ein Prisma, wodurch eine große Ø-Toleranz überbrückt werden kann. Die Druckfeder erleichtert das Klemmen und Lösen.

Form A: with socket cap screw DIN 912

Form B: with adjustable hand lever

Swivel clamp connector joints GN 490 clamp the rods or tubes via a prism, allowing a greater Ø tolerance to be bridged. The compression spring makes clamping and releasing easier.



Aluminium

- SW** = kunststoffbeschichtet
schwarz RAL 9005 strukturmatt /
powder coated
black RAL 9005 textured finish
- MT** = matt, gleitgeschliffen /
matte finish, tumbled