




Catalog No.	Form	d ₁	d ₂ / d ₃
SM 1205	D	063	M12




Grauguss, entgratet und gerommelt
cast iron, fettled and tumbled

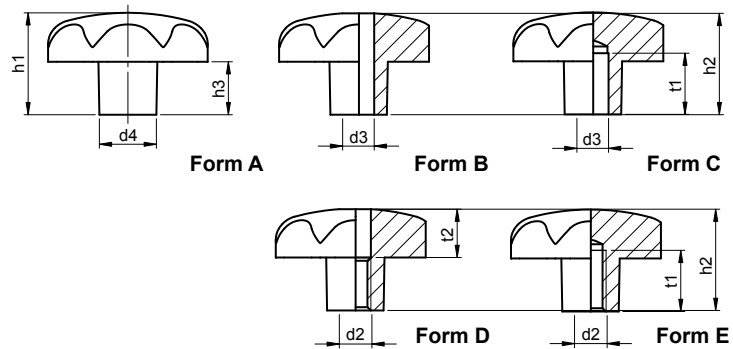

mm




Form A: Rohteil / casting only
Form B: durchgebohrt / through bore
Form C: Sackloch / blind bore
Form D: Gewinde, durchgebohrt / threaded through bore
Form E: Gewindesackloch / threaded blind bore



d ₁ Ø	d ₄ Ø	h ₁	h ₃	kg
Form A				
032	12	21	10	0,055
040	14	26	13	0,082
050	18	34	17	0,150
063	20	42	21	0,260
080	25	52	25	0,510



d ₁ Ø	d ₃ H7 Ø	d ₂ Ø	d ₄ Ø	h ₂	h ₃	t ₁	t ₂	kg	
	Form B / C	Form D / E						B / D	C / E
032	B06	M06	12	20	9,0	12	10	0,042	0,050
040	B08	M08	14	25	12,0	15	12	0,069	0,067
050	B08 / B10	M08 / M10	18	32	15,0	18	16	0,150 / 0,140	0,133 / 0,150
063	B10 / B12	M10 / M12	20	40	19,0	22	20	0,249 / 0,233	0,256 / 0,260
080	B12 / B16	M12 / M16	25	50	23,0	28	30	0,546 / 0,500	0,490 / 0,542

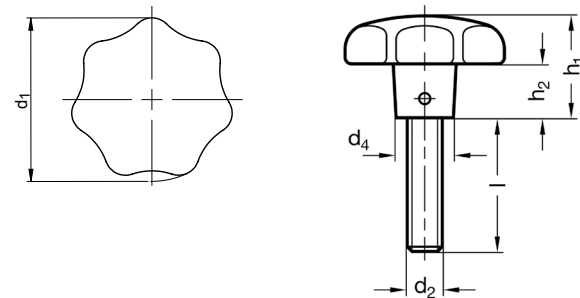

Catalog No.	d ₁	d ₂	X	I
SM 1205-1	032	M06	X	30



Griff: Gusseisen
entgratet und gerommelt
Schraube: Stahl brüniert
knob: cast iron
fettled and tumbled threaded
bolt: steel blackened



Die Schraube ist eingeschraubt und durch Querstift gesichert.
The threaded bolt is screwed in and secured by a cross-dowel.



mm



d ₁ Ø	d ₂ Ø	l							d ₄ Ø	h ₁	h ₂
032	M06	16	20	25	30	35	45		12	20	9
040	M08	16	20	25	30	40	55		14	25	12
050	M10	-	25	30	35	45	55		18	32	15
063	M12	-	30	35	40	50	60		20	40	19
080	M16	-	30	40	50	60	70		25	50	23