

Catalog No.	Thread
SM 1291-10	M03



Messing
brass



mm




Wird als Schutz beim Klemmen von Wellen und Gewindestangen eingesetzt.

Is to be used as protection when clamping spindels or threaded rods.



andere Abmessungen und Materialien
other dimensions and materials

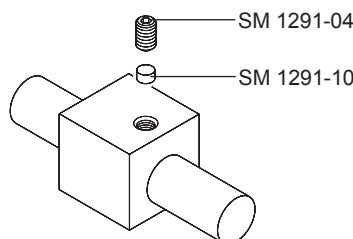


Für Gewinde for thread	d ∅	t	kg
M03	2,3	2,0	0,001
M04	3,0	2,5	0,001
M05	3,9	3,0	0,001
M06	4,7	3,5	0,001
M08	6,4	4,0	0,001
M10	8,1	5,0	0,002
M12	9,8	5,0	0,003
M14	11,5	6,0	0,005
M16	13,5	7,0	0,008

SM 1291-11

DIN 975

Gewindestange

Threaded rod

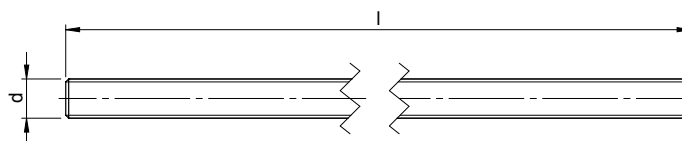

Catalog No.	d	Material
SM 1291-11	M03	ST



ST: Stahl, verzinkt / steel, zinc plated
NI: Edelstahl rostfrei / stainless steel
MS: Messing / brass



mm



Gewindestangen werden nur in 1000 mm Länge geliefert.

Threaded rods will only be delivered in 1000 mm length.



Feingewinde und andere Längen
fine-thread and other lengths



Reinigen mit
SM 1306
Clean with



Kleben mit
SM 1301
Lock with

Rostfrei				kg	Rostfrei				kg
d ∅			l	kg	d ∅			l	kg
ST	MS	NI			ST	MS	NI		
M02	M02	-	1000	0,018	M18	M18	-	1000	1,650
M02,5	-	-		0,029	M20	M20	M20		2,070
M03	M03	M03		0,044	M22	-	-		2,540
M03,5	-	-		0,060	M24	M24	M24		2,980
M04	M04	M04		0,078	M27	-	M27		3,000
M05	M05	M05		0,124	M30	-	M30		4,500
M06	M06	M06		0,177	M33	-	-		5,900
M07	-	-		0,248	M36	-	M36		6,900
M08	M08	M08		0,319	M39	-	-		8,200
M10	M10	M10		0,469	M42	-	-		9,400
M12	M12	M12		0,650	M45	-	-		11,200
M14	M14	M14		0,970	M48	-	-		12,400
M16	M16	M16		1,294	-	-	-		-