

Catalog No. SM 1002-1
Form A
d₁ 06.10



Spezialstahl
special steel



gehärtet und geschliffen
hardened and ground



HRC 63±1



mm



0,1; 0,25; 0,75 mm
über 15 mm 0,5 mm



andere Materialien und Abmessungen
other materials and dimensions



Grundbuchsen hierfür: Bohrbuchsen
SM 1000, 1000-1, 1000-2 und 1001.
passende Schrauben: SM 1003-1
Haltestifte: SM 1003-3

Basic bushings for this: Drill bushings
SM 1000, 1000-1, 1000-2 and 1001.
collar screws: SM 1003-1
dowel pins: SM 1003-3





CAD-Daten verfügbar
CAD-files available



RoHS
Konform
Compliant

renewable drill bushes
Steckbohrbuchse SM 1002-1
(als Schnellwechselbuchse)

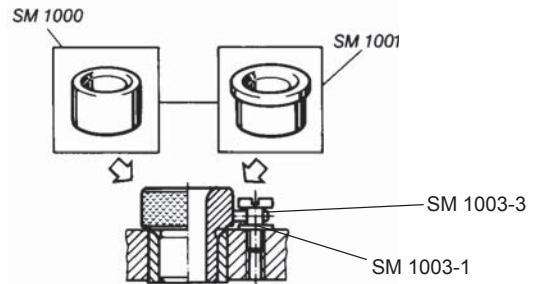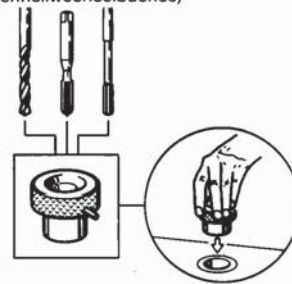

d ₁ F7	d ₂ m6	d ₃	d ₅	l ₁	l ₂	l ₃	l ₄	l ₅	tr	t ₃	r ₁	c	
01,00 - 02,00	8	16	2,5	20	10	1,25	1,0	4,00	0,02	4,0	3,0	15	
02,10 - 04,00												15	
04,10 - 06,00	10	19	3,0	22	12	1,50				5,0	4,0	17	
06,10 - 08,00												12	22
08,10 - 10,00	15	26	5,0	28	16	2,50				6,0	5,0	22	
10,10 - 12,00												18	30
12,10 - 15,00	22	35	8,0	36	20	2,50		5,00	0,04	7,0	6,0	28	
15,10 - 18,00												26	40
18,10 - 22,00	30	47	6,0	45	25	3,00	1,5	6,00		9,0	6,0	35	
22,10 - 26,00												35	55
26,10 - 30,00	42	62	8,0	50	30	3,00	2,0	6,00		10,0	8,0	41	
30,10 - 35,00												48	69
35,10 - 42,00	55	77	8,0	55	35	3,00	2,0	7,50		12,0	8,0	51	
42,10 - 48,00												62	85
48,10 - 55,00	70	95	8,0	55	35	3,00	2,0	7,50		14,0	8,0	55	
55,10 - 62,00												78	100
62,10 - 70,00	85	110	8,0	60	40	3,00	2,0	7,50		16,0	8,0	63	
70,10 - 78,00												95	120
78,10 - 85,00	105	130	8,0	70	45	3,00	2,0	7,50		16,0	8,0	74	
85,10 - 95,00												115	145
95,10 - 105,00	125	155	8,0	75	50	3,00	2,0	7,50		16,0	8,0	87	
													92